



DiskStation DS713+

Keeping up with the evolving needs of your business can be challenging. Get a head start with Synology® DiskStation DS713+ and its high-performance, straightforward approach to data-management and protection. Whenever you're ready, upgrade capacity with ease by adding an expansion unit. The Synology DiskStation DS713+ is backed with Synology's 3-year limited warranty.

Highlights

- **202.3 MB/sec Reading, 135.84 MB/sec Writing Speed**
- **Dual Core CPU & Super-Speed USB 3.0 Ports**
- **Dual-LAN Failover and Link Aggregation Support**
- **Hassle-free Scalability Up to 7 Drives With Synology DX513**
- **Extensive Surveillance With 20 HD IP Camera Capacity**
- **VMware® with VAAI support, Citrix®, Microsoft® Hyper-V® compliant**
- **Easy-to-Use Synology DiskStation Manager (DSM)**

High Performance Dual Core CPU

With dual core CPU and Link Aggregation, Synology DS713+ keeps up with the speed of your business with 202.3 MB/sec reading and 135.84 MB/sec writing speed under RAID1 configuration in a Windows environment.¹ For back up onto external hard drives, Super-Speed USB 3.0 ports provide ten times the transfer speed of its predecessor. Dual-LAN failover support and hot-swappable drives ensure continual service uptime during drive replacement or unexpected LAN failure.

Straightforward RAID-Management

Synology Hybrid RAID (SHR) automatically optimizes RAID capacity and protection based on hard drives installed, eliminating the need for identical sizes while retaining custom setup options for advanced users. Multiple Volumes on RAID allows for more than one volume to be created on a single RAID structure, giving you flexibility across all available drives. Volumes can be expanded as necessary by allocation on the easy-to-use UI, and Synology's DiskStation Manager (DSM) does the rest without any service interruption.

Flexible Scalability Up To 28 TB

When the storage capacity of DS713+ nears its limit, upgrading is easy with Synology DX513 expansion unit.² Connected via eSATA with especially designed locking devices, DX513 expands storage capacity up to a maximum of 28 TB with minimal time-investment in setup and configuration.

Virtualization Ready

Fully compliant with VMware, Citrix, and Hyper-V, with iSCSI and VAAI support, DS713+ is the most affordable virtualization storage solution of its kind, allowing SMB users to consolidate data storage while giving the illusion of locally attached disks.



Figure 1) Flexible Scalability

DS713+ can expand its capacity on the fly and enlarge volumes across its expansion unit for storage or backup.

Cross-Platform Interoperability

DS713+ runs Synology's award-winning DiskStation Manager (DSM) – an easy-to-operate OS which can be customized to include applications of your choice to fulfill your requirements.

Within your business environment, extensive network protocol support provides seamless cross-platform file sharing between Windows, Mac OS and Linux. Windows® AD and LDAP integration allows DS713+ to fit into existing business network infrastructure without having to recreate user accounts, while Windows ACL allows IT personnel to set up privileges to files and folders through familiar Windows UI, delivering peace of mind with simplicity.

Easy Backup Solutions

To protect your critical business data, DS713+ can become a centralized backup target for consolidating fragmented and unstructured information across your network through a range of options. PC users can backup to DS713+ with Synology's Data Replicator, while DS713+ also fully supports Mac OS X's native Apple Time Machine. Synology's own backup wizard can back up information to another Synology NAS or any rsync server, with the option of using an encrypted connection, or to an external hard drive via USB 3.0 or eSATA. The wizard can also back up your information to the cloud, including Amazon® S3 and STRATO HiDrive.


Multi-Purpose Packages

Additional functions in the form of one-click-installation packages allow your DS713+ to take the place of other hardware. VPN Server turns your DiskStation into a Virtual Private Network server, providing secure access to your private LAN from remote locations. Surveillance Station creates a centralized interface for the management of IP cameras. Additional approved 3rd party PHP web application featuring tools such as content management, customer relationship management & e-commerce systems can be hosted on DS713+ by using Web Station with support for PHP/MySQL® web content.

Energy Efficient Design

Synology DiskStations are designed and developed with energy efficiency in mind. Compared with its average PC counterpart, Synology DS713+ consumes relatively little power at 30.7 watts while operating. Wake on LAN/WAN and scheduled power on/off features can further reduce power consumption and operation costs. HDD hibernation can be configured to take effect automatically when the system has been inactive for a specified period of time to save energy and extend hard disk life. All Synology products are produced with RoHS compliant parts and packed with recyclable packing materials. Synology acknowledges the responsibility of a global citizen and works continually to reduce the environmental impact of every product.

Connections & Buttons

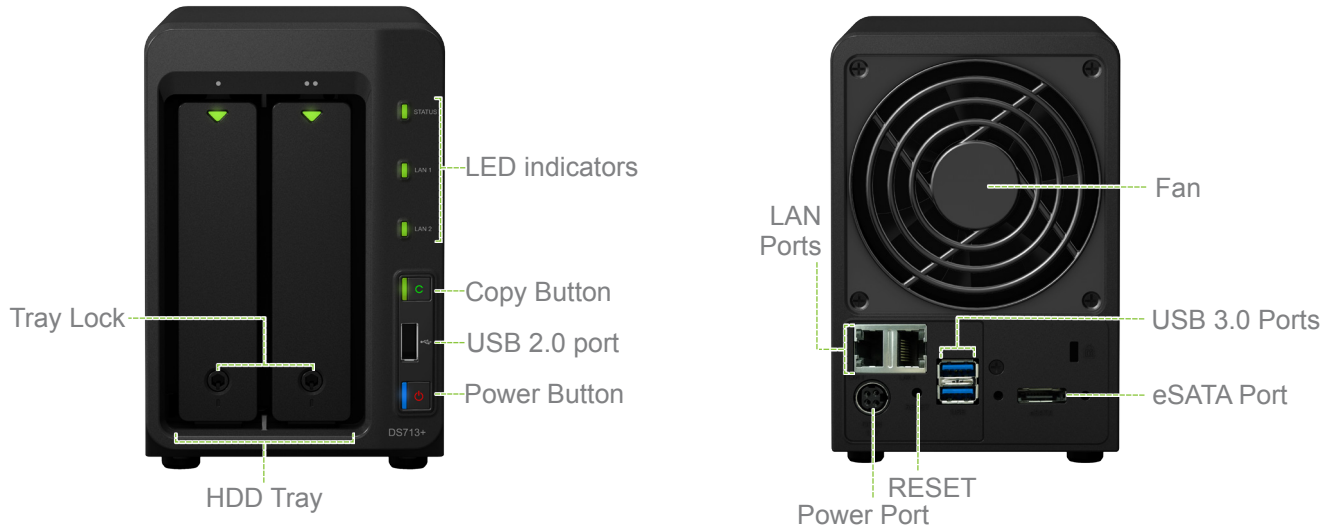

Technical Specifications

Hardware

| | |
|--------------------------------|---|
| CPU Frequency | Dual Core 2.13 GHz |
| Floating Point | Yes |
| RAM Size | DDR3 1 GB |
| Internal HDD/SSD | 3.5" or 2.5" SATA(III) X 2 (hard drives not included) |
| Max Internal Capacity | 8 TB (4 TB HDD X 2) (actual capacity will differ according to volume types) |
| Hot Swappable HDD | Yes |
| External HDD Interface | USB 3.0 ports X 2, USB 2.0 ports X 1, eSATA X 1 |
| Size (HxWxD) | 157 x 103.5 x 232 mm |
| Weight | 1.69 kg |
| LAN | Gigabit X 2 |
| Wake on LAN/WAN | Yes |
| Wireless Support | Yes (wireless dongles not included) |
| Noise Level ³ | 19.2 dB(A) |
| AC Input Power Voltage | 100V to 240V |
| Power Frequency | 50 Hz to 60 Hz, Single Phase |
| Operating Temperature | 5°C to 35°C (40°F to 95°F) |
| Storage Temperature | -10°C to 70°C (15°F to 155°F) |
| Relative Humidity | 5% to 95% RH |
| Power Consumption ⁴ | 30.72W (Access), 17.88W (HDD Hibernation) |

Applications

| | |
|----------------------------|---|
| File Station | Virtual Drive, Remote Folder |
| Backup Solutions | Network Backup, Local Backup, Desktop Backup (Window: Synology Data Replicator; Mac®: Apple® Time Machine® backup application), Shared Folder Sync - Max Task Number: 8, Configuration Backup |
| Mail Server | Supported Mail Server Protocols: POP3, SMTP, IMAP |
| FTP Server | Bandwidth Control, Custom FTP Passive Port Range, Anonymous FTP, Transfer Log |
| Web Station | Virtual Host (up to 30 websites), PHP/MySQL, 3rd-Party Applications Support |
| Printer Server | Max Printer #: 2, Printing Protocols: LPR, CIFS, IPP, Apple AirPrint™, Google Cloud Print™, Multi Functional Print Server (MFP functions are for Windows PC only) |
| iOS/Android™ Applications | DS photo+, DS audio, DS cam, DS file, DS finder |
| Windows Phone Applications | DS finder, DS audio, DS photo+ |

Add-on Packages

| | |
|--------------------------|--|
| Surveillance Station | Default IP cam #: 1, MAX IP cam # (licenses required): 20 (1 free license to install 1 IP camera. Additional licenses can be purchased to expand the license quota.) |
| Directory Server | LDAP Directory Server, Backup and Restore LDAP Database |
| VPN Server | Maximum Connections : 20, VPN Method: PPTP, OpenVPN™ |
| DHCP Server | Independent DHCP Server on Different Network Interfaces, Multiple Subnets Support, Address Reservation |
| Syslog Server | SSL Connection, Log Rotation: 6 months, 1 year, 2 years, 3 years, Email Notification |
| Mail Station | Webmail Interface for Mail Server, Receiving Mails from Multiple POP3 Mailboxes, Customizable SMTP Server |
| Antivirus Essential | Full System Scan, Scheduled Scan, White List Customization, Virus Definition Auto Update |
| Time Backup | Maximum Task Number: 8, Multiple File Versions Retained, Instant File Restoration |
| Cloud Station | Maximum User Accounts: 32, Retain Historical and Deleted File Versions |
| DLNA®/UPnP® Media Server | DLNA compliant, PS3®/Xbox 360® supported |
| Download Station | Supported Download Protocols: BT/HTTP/FTP/NZB/eMule Maximum Concurrent Download Tasks: 80 |
| Other Packages | Photo Station, Audio Station, iTunes® Server, 3rd-party packages |

General

| | |
|-------------------------|--|
| Networking Protocols | CIFS, AFP, NFS, FTP, WebDAV, CalDAV, iSCSI, Telnet, SSH, SNMP, VPN (PPTP, OpenVPN) |
| File System | EXT4, EXT3 (External Disk Only), FAT (External Disk Only), NTFS (External Disk Only) |
| Storage Management | Max File System Size: 108 TB, Max Internal Volume #: 512, Max iSCSI Target #: 32, Max iSCSI LUN#: 256, Supported RAID Type: Synology Hybrid RAID, Basic, JBOD, RAID 0, RAID 1; with DX513: RAID 5, RAID 5+Spare, RAID 6; with DX513 or DX213 RAID 10, Synology Expansion Unit Support : DX513, DX213 |
| File Sharing Capability | Max User Account: 2048, Max Group: 256, Max Shared Folder: 256, Max Concurrent CIFS/AFP/FTP Connections: 512 |
| Privilege | Windows Access Control List (ACL) |
| Directory Service | Windows AD Domain Integration, LDAP Integration |
| Virtualization | VMware vSphere 4, Microsoft® Hyper-V, Citrix Ready |
| Security | FTP over SSL/TLS, IP Auto-Block, Firewall, Encrypted Network Backup over Rsync, HTTPS Connection |
| Utilities | Synology Assistant, Synology Data Replicator |
| Supported Clients | Windows XP onward, Mac OS X® 10.5 onward, Ubuntu 9.04 onward |
| Support Browsers | Chrome, Internet Explorer®: 8, 9, Firefox®, Safari® (Mac): 5 |
| Language | English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svensk, Nederlands, Русский, Polski, Mag Português do Brasil, Português Europeu, Türkçe, Český, 日本語, 한국어, 繁體中文, 简体中文 |

Environment and Packaging

| | |
|----------------------|--|
| Environment | RoHS Compliant |
| Package Content | DS713+ Main Unit, Installation Disc, Welcome Note, Assembling Kit, AC Power Cord, RJ-45 LAN Cable X2 |
| Optional Accessories | Remote, Camera License Pack, Expansion Unit (DX513, DX213) |
| Warranty | 3 years |

*Model specifications are subject to change without notice. Please refer to www.synology.com for the latest information.

1. Performance figures could vary on different environments.
2. DS713+ supports up to one Synology DX513/DX213, purchased separately.
3. Fully loaded with Seagate® ST31000520AS hard drive(s) in operation; Two G.R.A.S. Type 40AE microphones, each set up at 1 meter away from the DiskStation front and rear; Background noise: 17.1 dB(A); Temperature: 24.2°C; Humidity: 63; More details about dB(A) value, check <http://www.memtechacoustical.com/facts.asp>
4. Measured with 12 Western Digital® 3TB WD30EZR hard drives. The figures could vary on different environments.

SYNOLOGY INC.

Synology is dedicated to taking full advantage of the latest technologies to bring businesses and home users reliable and affordable ways to centralize data storage, simplify data backup, share and sync files across different platforms, and access data on-the-go. Synology aims to deliver products with forward-thinking features and the best in class customer services.

Copyright © 2012, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice. Printed in Taiwan.

DS713+-2012-ENU-REV002

Headquarters

Synology Inc.
3F-3, No. 106, Chang An W. Rd.,
Taipei, Taiwan
Tel: +886 2 2552 1814
Fax: +886 2 2552 1824

France

9 rue Benoît Malon,
92150 Suresnes,
France
Tel: +33 1 46 14 87 73

North & South America

Synology America Corp.
13343 NE Bel-Red Road,
Bellevue, WA 98005, USA
Tel: +1 425 818 1587

UK

Synology UK Ltd.
Etheridge Avenue, Brinklow,
Milton Keynes, MK10 0BP, UK
Tel: +44 1908 587422

Germany

Synology GmbH
Königsallee 92a
40212 Düsseldorf, Germany
Tel: +49 (0)211 5403 9658